

RF Attenuator 1KW, DC-2 GHz


TECHNICAL DATA SHEET

APA-2-1000

Specifications:

Parameter	Specification
Frequency Range	DC - 2GHz
Impedance	50 Ω
Attenuation Values	30dB min
Attenuation accuracy	+/- 1.5 dB max
RF input power	1000 Watts average
RF Connector	N type
VSWR	1.4 : 1 maximum

*Note: Specifications may vary as per the requirements

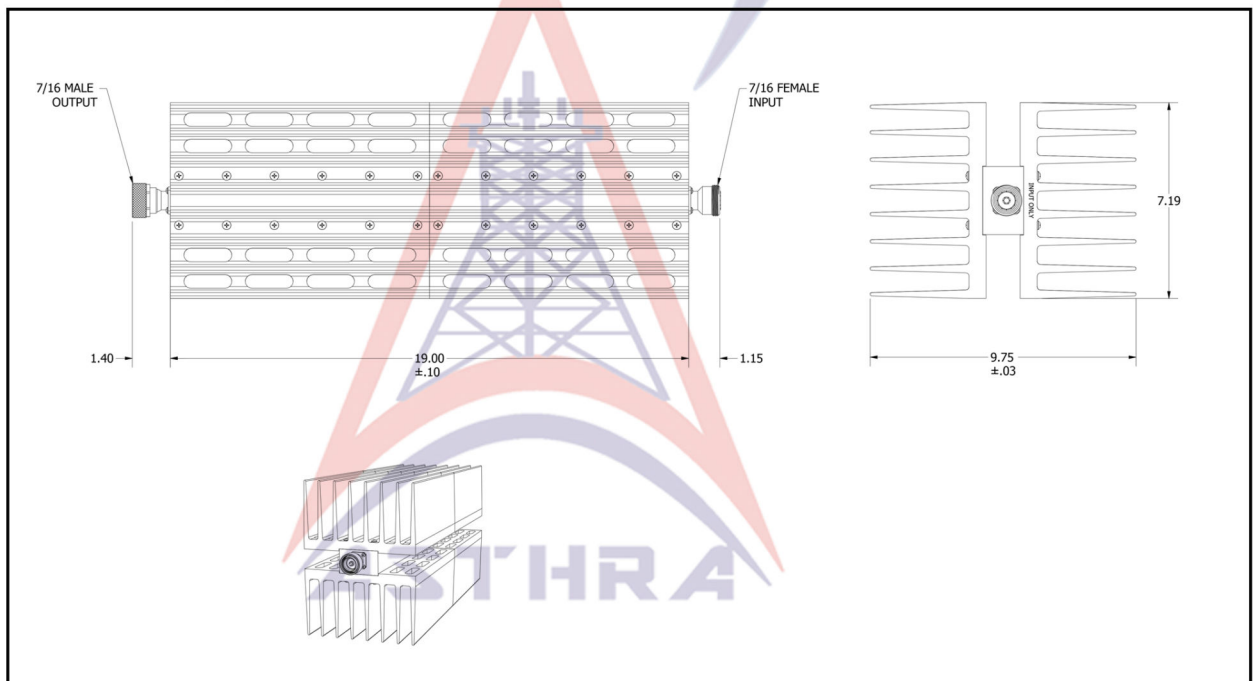

*Dimensions may vary

ASTHRA PROJECTS

#LIG- B329, Near old HMTV, Dr.A.S.Rao Nagar,
ECIL Post, Hyderabad-500062. Ph: 040-40264887
Mail: info@asthraprojects.com
Web: www.asthraprojects.com